LIGHTHOUSE®

USER MANUAL L/H RWL2000HD
HEAVY-DUTY RECHARGEABLE WORK LIGHT

BEFORE USING FOR THE FIRST TIME

Please ensure you read and understand these instructions clearly before using this product for the first time. Failure to do so could result in personal injury or damage to this product or property. It is important you retain this user manual for future reference.

SAFETY PRECAUTIONS

- ► Do not use the work light in the immediate vicinity of inflammable materials or gases.
- ► Make sure that the light is not covered during use.
- ► Only use the accessories included with this product when charging the work light.
- ► Keep this work light out of reach of children and pets.
- ► Do not point the light directly in your own, any other person's or animals eyes.
- ► Always check the cable before charging. If the cable or any part of the charger is damaged, replace with a like for like spare.

TECHNICAL DATA

BRIGHTNESS	Up to 2000 Lumens
LED COLOUR	6500K
RUN TIME	Up to 12 Hours
WATTAGE	20W
BATTERY TYPE	3.7V 5000mAh Li-ion
CHARGE TIME	Approx. 3.5 Hours
CHARGING INPUT	5V 2000mA Max.
POWER BANK	5V 1000mA Max.
IP/IK RATING	IP44/IK07
SUPPLIED WITH	1x USB-C Charging Lead 1x Alternative Lense

USB OUTPUT - *POWERBANK*

- ► Ensure there is sufficient charge in the work light before attempting to charge a separate device. You may still use the work light to charge devices even when power is low, but this may affect the charge speed and time if the battery level in the work light is significantly low.
- ► Before charging any device, check the condition of the charging cable to ensure it is safe to use.
- ► Plug one end of the cable into the work light and the other end into the device that requires charge.
- ► The work light will automatically begin charging as soon as a device is connected and cease when the device is disconnected.

RECHARGING

- ► Ensure the battery is fully charged before using the work light for the first time.
- ► It is important for the work light to be charged every three months to maintain the optimum condition of the battery.
- ► Using the supplied charging cable, plug the USB-A end into a suitable USB mains charging socket and plug the USB-C end into the USB-C port at the rear of the work light. Charging should start immediately.
- ► The battery charge status can be determined by observing the four LEDs at the rear of the work light. Once all four LEDs are illuminated, the battery should be fully charged.

CLEANING

Use a soft cloth or cotton swab with water to clean the lens. Care should be taken during cleaning. Allow the work light to completely dry before using. Do not use any harsh chemicals or abrasive materials when cleaning, as this may damage the light.

OPERATING FUNCTIONS

This work light cycles through four operating functions by continuously pressing the **on/off** button.

- ► 1st press: ON (Full Brightness)
- ► 2nd press: 50% Output
- ► 3rd press: 25% Output
- ► 4th press: OFF

NOTE:
If left in any mode for 5 seconds or more, the next press will switch the work light off.

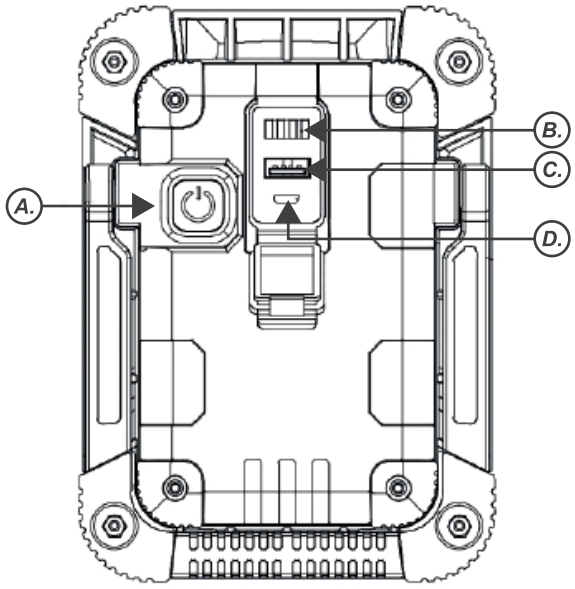

DIAGRAM

A. ON/OFF switch
B. LED battery charge indicator
C. USB-A output socket
D. USB-C output socket

CHANGING THE LENSE

This work light is supplied with a diffused lense that can be attached over the LED light when required. This provides a different beam style.

- ► While securing the work light, twist the green bezel that surrounds the LED lense in an anti-clockwise direction until completely removed.
- ► Once the bezel has been removed, the thread around the main LED will become visible. Take the diffused lense and position over the thread then screw onto the thread in a clockwise direction.
- ► Ensure the diffused lense is finger tight, do not over-tighten.
- ► It is important to note the lense may become warm during prolonged periods of use. Always exercise caution when swapping lenses to avoid personal injury or damage to product.

GUARANTEE

Rechargeable battery life depends on many factors and the cells can become easily damaged, dependent on environmental and storage conditions. Your product is guaranteed from defect for a period of **1 YEAR**, this excludes the battery which is covered for **90 DAYS** from the date of purchase, if you notice the running or charge times decreasing this is normal over the lifetime of the battery and is classed as fair wear and tear.

There will be some items within our range which will be non-serviceable but, in most cases we can supply replacement batteries for our products.

DISPOSAL OF THIS PRODUCT

If at some point you intend to dispose of this product, please keep in mind that many of its components consist of valuable materials which can be recycled. Please do not dispose of this product in the household waste bin, check instead with your local council for recycling facilities in your area.

Do not dispose of used batteries in the household waste, or expose to fire. Lighthouse hold no responsability for personal injury or damage caused by incorrectly disposing of batteries.

FULL INFO

INTENDED USE

This work light must ***ONLY*** be used for it's intended purpose. Any other than those mentioned in these instructions will be considered a case of misuse. The user, and not the manufacturer shall be liable for any damage or injury resulting from such cases of misuse. The manufacturer shall not be liable for any modifications made to the product, nor for any damage resulting from such modifications. If any modifications have been made to this work light, it may void any guarantee associated with this product.

LIGHTHOUSE TORCHES
Long Reach, Galleon Boulevard,
Crossways Business Park, Dartford, Kent
DA2 6QE, United Kingdom.

QFF DISTRIBUTION
24 Magna Drive, Magna Business Park,
Citywest Road, Dublin 24,
D24 FNY0, Ireland.

www.lighthouse-torches.com