LIGHTHOUSE®

USER MANUAL L/H SLHDPRO
110V HEAVY-DUTY SITE LIGHT


BEFORE USING FOR THE FIRST TIME

Please ensure you read and understand these instructions clearly before using this product for the first time. Failure to do so could result in personal injury or damage to the product. It is important you retain this user manual for future reference.

SAFETY PRECAUTIONS


- ► Do not use the site light in the immediate vicinity of inflammable materials or gases.
- ► Make sure that the light lens is not covered during use.
- ► Do not use this site light if any part is damaged.
- ► Keep the site light out of reach of children and pets.
- ► Do not point the beam directly in your own, any other person's or animals eyes.
- ► Always check the mains cable before using the site light. If any part appears damaged, do not use until repaired by a qualified technician. If any repair has been carried out by unauthorised personal, it may void any warranty associated with this product.
- ► Always check that the voltage displayed on the product is the same as the mains power source.
- ► Never use an electrical appliance in the rain, in wet areas or with wet hands. Using an electrical appliance under these conditions greatly increases the possibility of electric shock.


Locking & Unlocking

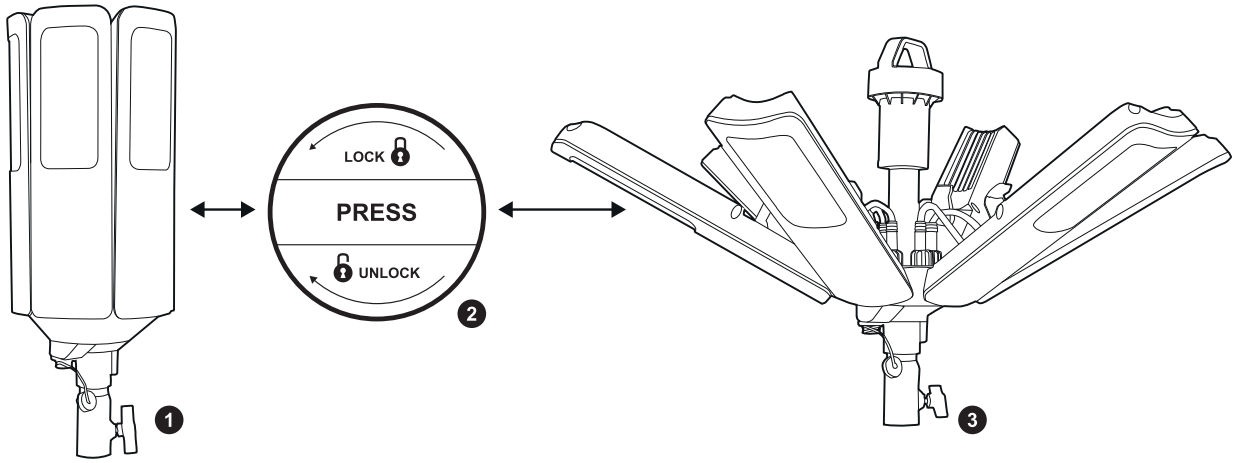

1. To lock and unlock the lamp from it's 45 and 90 degree positions, depress the grab handle at the top of the unit (**Figure 2**) and twist anti-clockwise to lock and clockwise to unlock.

Powering Up

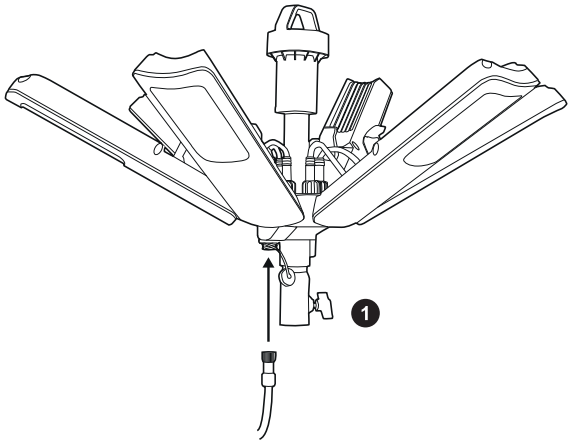

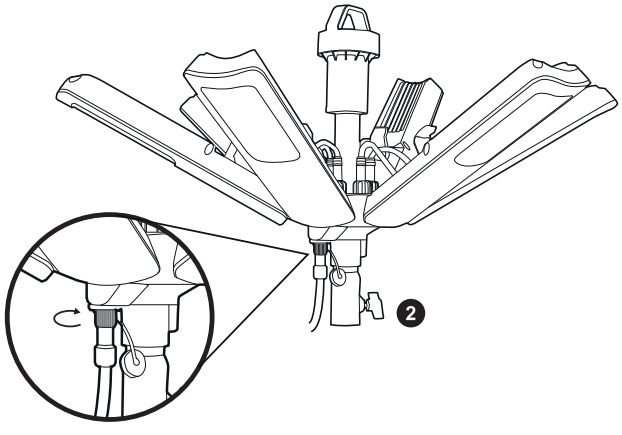


2. To power up the light, first attach the power cable by plugging the connector into the socket at the base of the light's head (**Figure 1**).

   Once attached, fasten the end of the cable (**Figure 2**) to ensure a safe and reliable connection is made and maintained.

3. Once the power cable is connected, plug the Driver unit into a standard mains socket and press the **ON / OFF** button on the control panel. To achieve different light output modes, press the desired light output percentage button located on the control panel.

Driver Control Panel

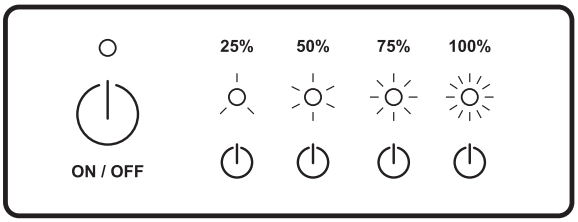

CLEANING

Before cleaning the LED floodlight, disconnect the power cable and allow the floodlight to cool down sufficiently. Clean with a dry or slightly moist, clean, lint-free cloth and a mild detergent if required. Do not use cleaning solutions that contain abrasives or solvents.

MAINTAINENCE

Check the plug, power cable and housing of the LED floodlight for damage before each use. If the lens is damaged it must be replaced immediately.

Clean any dirt from the housing or lens immediately since it could cause overheating.

NOTE

1. This manual is subject to change without notice.
2. Lighthouse Torches take no responsibility for any personal injury, loss or damage caused by the impropriate or misuse of this product.
3. The contents of this manual cannot be used as the reason to use the light for any other special application.

*CRI

Colour Rendering Index (CRI) is the measurement of how colours look under a light source when compared with sunlight. The index is measured from 0-100, with a perfect 100 indicating that colours under the light source appear the same as they would under natural sunlight.

TECHNICAL DATA

BRIGHTNESS	22000 Lumens
LED COLOUR	6500K
LED LIFE SPAN	50,000 Hours
WATTAGE	200W
MAINS POWER	110V
BEAM DISTANCE	50M
CABLE LENGTH	10M
IP RATING	IP65 (Head Unit) IP44 (Driver)

DISPOSAL OF THIS PRODUCT

If at some point you intend to dispose of this product, please keep in mind that many of its components consist of valuable materials which can be recycled. Please do not dispose of this product in the household waste bin, check instead with your local council for recycling facilities in your area.

Do not dispose of used electronics in the household waste, or expose to fire. Lighthouse hold no responsability for personal injury or damage caused by incorrectly disposing of electronic components and wires.

The plastic in this product may contain chemicals known by the state of California to cause cancer and birth defects or other reproductive harm.

GUARANTEE

Your product is guaranteed to the original purchaser for a period of **ONE YEAR** against any defects in material or workmanship, but shall not cover damage caused by misuse, abuse, alteration or accident. This product is intended for domestic and trade use.

In the case of products used for hire, the guarantee period is restricted to **THREE MONTHS** from original purchase date.

There will be some items within our range which will be non-serviceable but, in most cases we can supply replacement parts for our products. Lighthouse Torches take no responsibility for any personal injury, loss or damage caused by impropriate or misuse of this product.

LIGHTHOUSE TORCHES
Long Reach, Galleon Boulevard, Crossways Business Park,
Dartford, Kent, DA2 6QE, United Kingdom.

QFF DISTRIBUTION
24 Magna Drive, Magna Business Park, Citywest Road,
Dublin 24, D24 FNY0, Ireland.

www.lighthouse-torches.com

UK CA CE RoHS 2011/65/EU