LIGHTHOUSE®

USER MANUAL L/H SLT76T & L/H SLT76TL
76W TWIN SITE LIGHT

BEFORE USING FOR THE FIRST TIME

Please ensure you read and understand these instructions clearly before using this product for the first time. Failure to do so could result in personal injury or damage to the product. It is important you retain this user manual for future reference.

SAFETY PRECAUTIONS

- Do not use the site light in the immediate vicinity of inflammable materials or gases.
- Make sure that the light lens is not covered during use.
- Do not use this site light if any part is damaged.
- Keep the site light out of reach of children and pets.
- Do not point the beam directly in your own, any other person's or animals eyes.
- Always check the mains cable before using the site light. If any part appears damaged, do not use until repaired by a qualified technician. If any repair has been carried out by unauthorised personal, it may void any warranty associated with this product.

TECHNICAL DATA

BRIGHTNESS	8000 Lumens
LED COLOUR	6500K
LED POWER	76W (38W Per Head)
LIGHT SOURCE	SMD LED
LED LIFETIME	50,000 Hours
BEAM ANGLE	120°
MAX HEIGHT	2050mm
MIN HEIGHT	970mm
IP RATING	IP44
CABLE LENGTH	3 Metres

CLEANING

Use a soft cloth or cotton swab with water or medical alcohol to clean the lens. Care should be taken during cleaning. Allow the torch to completely dry before using. Do not use any harsh chemicals or abrasive materials when cleaning, as this may damage the torch.

MAINTENANCE

LED bulbs should not wear out under normal conditions and do not need to be replaced. All repairs should only be carried out by qualified service personnel. Opening or visible attempts to open or repair a light may void any guarantee and/or cause damage to the product or personal injury.

DISPOSAL OF THIS PRODUCT

If at some point you intend to dispose of this product, please keep in mind that many of its components consist of valuable materials which can be recycled. Please do not dispose of this product in the household waste bin, check instead with your local council for recycling facilities in your area.

Do not dispose of used electronics in the household waste, or expose to fire. Lighthouse hold no responsability for personal injury or damage caused by incorrectly disposing of electronic components and wires.

The plastic in this product may contain chemicals known by the state of California to cause cancer and birth defects or other reproductive harm.

QUICK RELEASE CATCH

The head unit can be detatched from the tripod via a quick release catch. This is so the light unit can be used in areas that don't require a tripod.

1. Lift up the black metal clip where the light and tripod are joined(1)
2. This will loosen the silver hooks, allowing you to unclip the light(2)
3. Lift the light away from the tripod.(3)



TRIPOD

The tripod footprint can be adjusted or completely folded away for easy storage. This is achieved by turning the dial on the base of the tripod.

1. Loosen the dial(2) and push or pull on the black plastic upper leg holder(2) to increase(1) or decrease(3) the footprint of the tripod.
2. Tighten the dial(2) so that the tripod legs are secure.

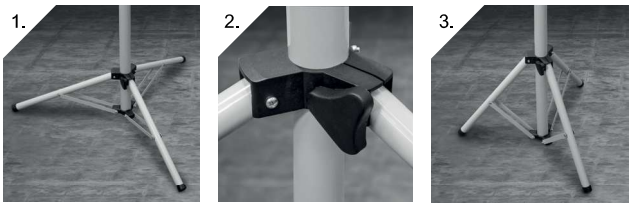

GUARANTEE

Your product is guaranteed to the original purchaser for a period of **ONE YEAR** against any defects in material or workmanship, but shall not cover damage caused by misuse, abuse, alteration or accident. This product is intended for domestic and trade use.

In the case of products used for hire, the guarantee period is restricted to **THREE MONTHS** from original purchase date.

There will be some items within our range which will be non-serviceable but, in most cases we can supply replacement parts for our products. Lighthouse Torches take no responsibility for any personal injury, loss or damage caused by impropriate or misuse of this product.

LIGHTHOUSE TORCHES
Long Reach, Galleon Boulevard, Crossways Business Park, Dartford, Kent, DA2 6QE, United Kingdom.

QFF DISTRIBUTION
24 Magna Drive, Magna Business Park, Citywest Road, Dublin 24, D24 FNY0, Ireland.

www.lighthouse-torches.com

UK CA CE RoHS 2011/65/EU